



ALLIGATOR

Tyres That Goes Miles & Smiles With You



Tyres That Goes Miles & Smiles With You

MADE IN
INDIA



OTR | TRUCK & BUS | LCV | FORKLIFT | IMPLEMENT | TRACTOR | TWO-THREE WHEELER
BIAS/NYLON TYRES COMPLETE RANGE OF BUTYL TUBES

OUR COMPANY

Striking International is one of the leading manufacturers and exporters of a wide range of Tyres & Tubes under the brand name "**ALLIGATOR**" and "**MILLER**". Under the leadership of Mr. Gurender Dhand & Mr. Narinder Kumar (Company Directors), the group is expanding with a steady and stable annual growth rate Year after Year. Furthermore, its products and services have won accolades from the patrons in markets of South-Central America, Mediterranean Europe, Middle-East, East Asia & AFRICA and other parts of world.

Striking International continually expands its production base and now offers a comprehensive product range exceeding 900 SKUs. Our products are sold in more than 73 countries across the globe. Our unwavering passion has solidified our reputation as a leading manufacturer and exporter of agricultural, industrial, Commercial, 2 & 3 Wheeler, and off-road tires (Complete Range of BIAS & NYLON Tyres). Striking International is Manufacturing Premium Quality Butyl Tubes for Complete Range also.



STRIKING Group tire manufacturing facilities are located in Gujarat, Ghaziabad & Ludhiana equipped with state-of-the-art machinery operated by highly qualified personnel. In line with our philosophy, we believe in placing the right people in the right positions to implement world-class production techniques, resulting in the production of high-quality products. Today, ALLIGATOR Brand is recognized as one the leading Manufacturer & Exporter from India.

As our manufacturing facilities maintain the highest Quality standards, with strict in time control checks along with ensuring superior quality Products for our valuable Clients across 5 continents. Striking Group is equipped with all the tires ranges are in-compliance to various quality standards viz. CCC, ISO, E-MARK, DOT, SNI and SON.





SI 215 (SKS)

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	265	800	14	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	325	850	35	2265	80	5.5	2865	80	5.5



HD RIM GUARD

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	267	795	28	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	367	845	28	2265	80	5.5	2865	80	5.5




INDUSTRIAL/ GRADER **TYRES**

Bias/Nylon Tyres



SI 220 (HULK)

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	259	798	35	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	325	850	35	2260	80	5.5	2865	80	5.5

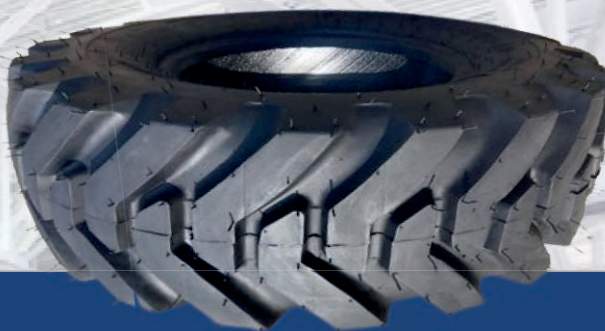

SI 216 (MPT)

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
12.5/80-18	Loader	14	310	990	26	3150	71	4.9	2180	71	4.9



SI 216 (ROCK)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
16.9-24	Industrial	12	440	1310	27	2900	32	2.2
19.5L-24	Industrial	16	490	1325	30	4125	42	2.9
18.4-26	Industrial	12	472	1425	28	4375	42	2.9
16.9-28	Industrial	12	440	1410	28	3450	38	2.6

INDUSTRIAL/ GRADER **TYRES**

Bias/Nylon Tyres



GRIPSTER HD

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
13.00-24	Industrial	16	350	1295	21	3350	58	4
14.00-24	Industrial	16	380	1350	27	3650	54	3.7
16.9-24	Industrial	16	590	1320	27	3900	38	2.6
17.5-25	Industrial	16	596	1320	26	3350	40	2.75
20.5-25	Industrial	16	500	1485	31.5	8820	33	2.2
23.5-25	Industrial	16	595	1610	32	10475	39	2.0



ROAD KING (R3)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
23.1-26	Industrial	16	595	1575	28	9645	33	2.28



ROCKSTER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
16.9-28	Industrial	12	275	1460	33	2722	110	2.4





S.I.

Running to Lead...

STRIKING INTERNATIONAL

H.O. : SCO 1-2, Above PNB, G.T. Road, Sahnewal-141120, Punjab, INDIA

Tel. : +91 96463 34321 • Fax : +91 161 2847321

E-mail : dhand.gurender@live.com, info@alligatortyres.com

Website : www.alligatortyres.com